

BOGE AIR. THE AIR TO WORK.



BOGE S-4 series

Designed to take the lead



Made in Germany 
since 1907

Innovative down to the smallest detail. Available from 75 to 200 hp

Designed as a driving force for industrial progress: BOGE's S-4 series represents a significant breakthrough in terms of energy consumption, noise emissions and ease of maintenance. Whether 75 or 200 hp – all S-4 models have a premium airend (IntegrateDrive) developed in-house, which is designed for maximum efficiency and virtually maintenance-free operation.



Innovative separation technology

Designed for optimal oil separation, low residual oil content and a long service life of up to 9000 operating hours as well as safe, convenient cartridge replacement.

Logical easy-access principle


Whether oil or air cooler – both can be removed via a side service door for easy, convenient maintenance and cleaning.

Optimized airend

Thanks to their optimal peripheral speed and advanced rotor profile design BOGE airends deliver the highest levels of efficiency - either for direct drive (with optional speed control) or with IntegrateDrive.

Elastic "SilentMount" suspension

The drive motor, airend and oil separation tank are secured to the base frame with elastic mountings to ensure vibration isolation and lower noise levels.

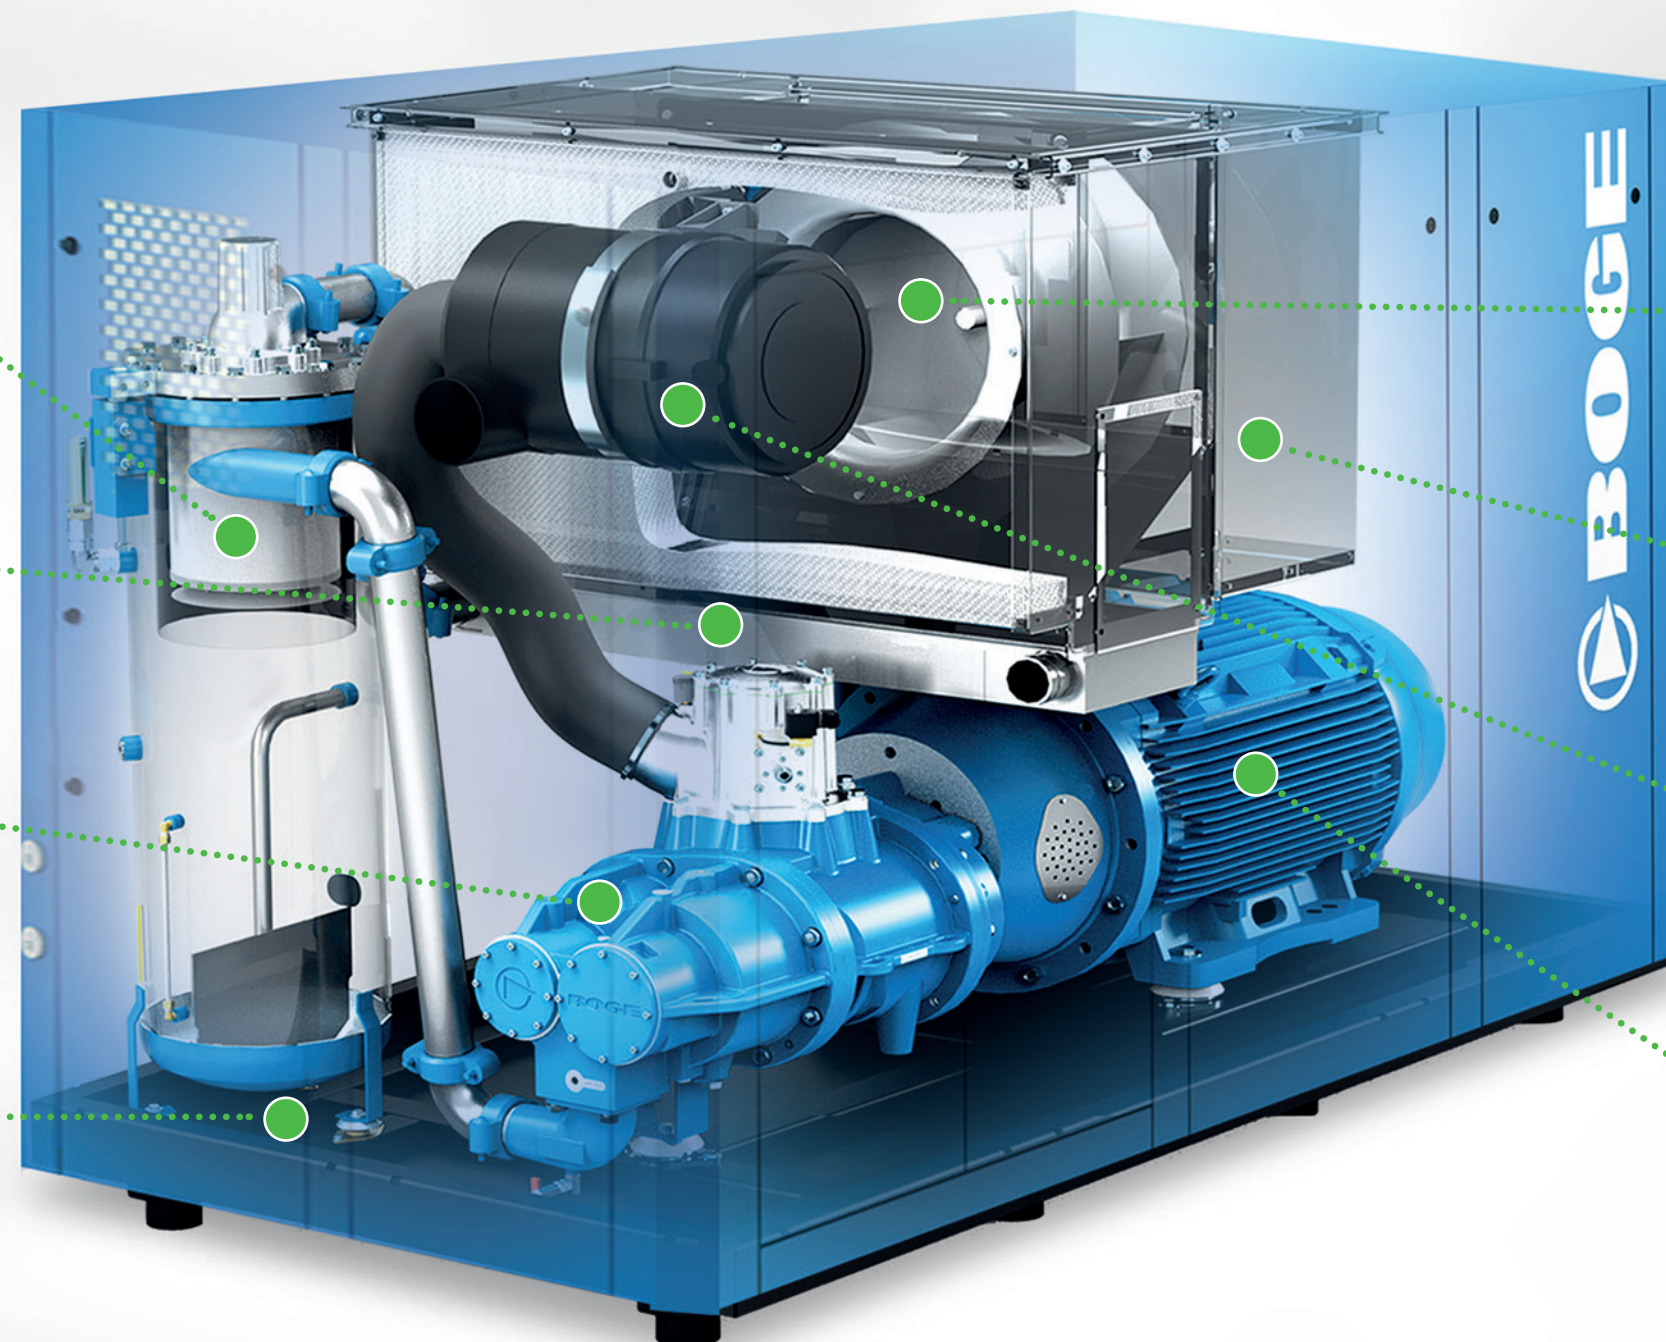

Low-speed radial fan

The extremely quiet and slow radial fan offers enough pressure reserves for the connection of a short exhaust duct piece.

Sound-optimized cooling air duct

The large cooling air duct is multi-directional to keep the sound pressure level generated by the drive and the airend to a minimum.

Effective intake filter

For the most effective cleaning of the intake air and minimum wear of the airend, the intake air is pre-separated and then fine-filtered in all S-4 models.

Efficient drive motor

Only highly efficient IE3 or (on request) IE4 motors are used to ensure maximum efficiency – with optional automatic, demand-driven lubrication unit.

Increasing efficiency to a whole new level

The latest generation of BOGE screw compressors sets all the benchmarks for continuous compressed air demand when it comes to the quiet, efficient and reliable production of compressed air. However diverse the operating conditions may be, with its robust technology, minimal internal pressure losses and pioneering improvements to ensure maximum efficiency, the S-4 series quickly pays dividends anywhere. It also requires surprisingly low maintenance.

MADE
by
BOGE

Efficiency-optimized airend

The airend with integrateDrive reduces internal pressure losses as well as energy consumption and noise levels. What's more: all output ranges and pressures can be variably controlled.




Easy access principle for simple maintenance

All sound-insulating panels on the S-4 can be removed for easy access to all components in next to no time. Access is limited to two sides, and thanks to intelligent details, such as the drawer principle for oil and air coolers, easy maintenance is guaranteed.



Longevity thanks to intelligent design

Generously sized components ensure low internal pressure losses and maximum efficiency. Our completely maintenance-free integrateDrive is enclosed and lubricated with the oil circulation of the compressor. A minimum pressure non-return valve and a suction regulator also ensure a gentle, non-wearing startup. This keeps pressure losses to a minimum, and the compressor is vented after switching off.

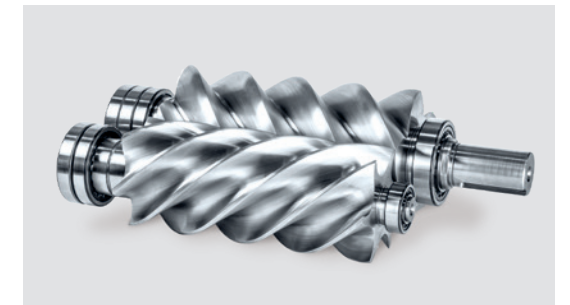

Quieter for greater flexibility

Every design feature has been developed with maximum noise reduction in mind – from the low-rotating airends and radial fans to the choice of innovative recycling material for sound insulation: It is environmentally friendly, non-flammable and boasts a high adsorption factor. Result: the quietest screw compressors in their class and maximum installation flexibility.




Simply everything under control

An intelligent control concept underlies the formidable improvement in efficiency of this series. The modular focus control 2.0 is state-of-the-art, because it allows you to have simply everything under control – with the emphasis on “simply”: this higher-level control, which also serves as a network control for up to four compressors, makes compressed air generation more efficient and reliable.



Intelligent control: focus control 2.0

The focus control 2.0 controls up to four connected compressors with base load switching as required and monitors all inlet and final pressures. Whether the most powerful compressor is always switched on first or the oldest is always switched on last, or whether they are all used to capacity equally so that maintenance can be carried out at the same time – this modular control provides enormous flexibility, providing a simple solution while ensuring redundancy.

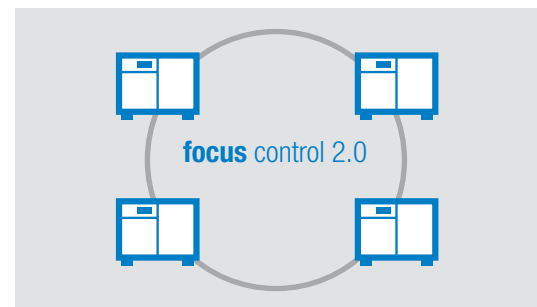

No more limits: airtelligence provis 3

This intelligent, higher-level interlocking control can handle an unlimited number of compressors, compressed air networks and accessory components. Its high-performance control algorithms monitor and control the entire compressed air station – proactively and according to use. The control is operated intuitively with touch commands on a 15.6" display.




Smart lubrication

A long service life requires regularly lubricating the bearings of the drive motor at the prescribed intervals. You can choose to have the focus control 2.0 do this for you too: when the time comes, the control will automatically activate the lubricator to apply a precise amount of grease to the bearings. Naturally this is only done when the motor is running, as stipulated by the manufacturer.



The future today: BOGE connect

BOGE connect is your ticket to Industry 4.0: all of the system data and machine details are continuously sent to the BOGE connect portal. The data can be visually displayed on any smart device. The key advantage: BOGE connect independently detects inefficient systems, helps identify optimization potential and simplifies service.

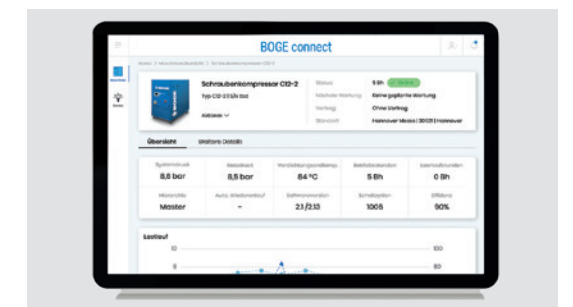

Tailored exactly to meet your requirements


Refrigerant dryer with energy savings

Minimum pressure losses and constant pressure dew points in every phase of operation – BOGE's powerful high-pressure refrigerant compressed air dryer saves energy and considerably increases efficiency. It can be continuously adjusted to the operating conditions while consuming only small amounts of environmentally-friendly, ozone-neutral refrigerants.



Adsorption dryer with dew point control

BOGE's heat-regenerating adsorption dryers offer a highly energy-efficient solution for large compressed air applications. The standard dew point control makes it possible to extend the drying phase and significantly reduce the energy required for regeneration.

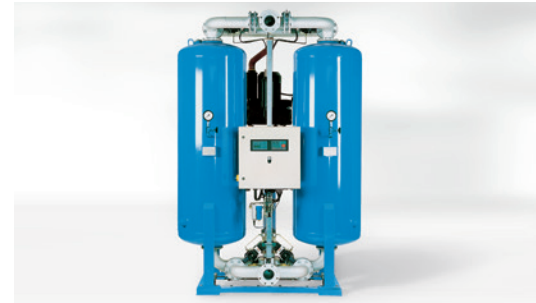

Systematic heat recovery

Much of the energy supplied to a compressor is converted to heat. BOGE Duotherm provides you with approx. 72 percent of this energy in the form of heat for further use – for heating and domestic water or process support with a quick return on investment. This system can also be very easily retrofitted at any time.



Container solutions with all the trappings

Not enough space to expand your compressed air production? Thinking of relocating production areas? A container solution is ideal for such scenarios - there's room for everything: compressors, processing and control technology. Thanks to its compact design and ease of access for maintenance purposes, models from the S-4 series are just perfect for this plug and play solution.



For many decades, BOGE has been the top name for tailored solutions, because as well as highly specialized system components for compressed air treatment, we also offer turn-key compressed air stations that meet your requirements exactly.



Any time, anywhere. BOGE all-round service

As original compressed air pioneers, we have more to offer than just our technological expertise. BOGE has always worked closely with customers and distribution partners, and this has shaped our excellent service partnership. As our success depends on your satisfaction, we relentlessly strive for improvement and to provide you with compressed air that has added value to your process.

Always on call: our engineers

Whether commissioning, maintenance, repair or inspection – our certified BOGE service engineers around the world are your professional port of call for all technical matters. In addition, our Technical Support is available round the clock – 7 days a week.



5 year warranty: BOGE bestair

BOGE's bestair programme gives you five years' guaranteed protection for all replacement parts. This warranty is free for you and we will provide free replacement parts immediately for the entire period. Any maintenance required will be performed by certified BOGE service engineers – with original BOGE parts of course.



All inclusive: our cairpacs

Original BOGE parts are tested prior to release for several thousand hours to ensure consistently high system efficiency and to minimize the risk of unplanned machine stoppages. Regular maintenance with original BOGE parts, therefore, protects your investment. Our BOGE cairpac maintenance packages include all the parts required for maintenance and cost less than the sum of the individual parts.



Tailormade: maintenance agreements

Regular maintenance considerably prolongs the service life of your system. To this end, we offer tailormade service packages – from system inspection and maintenance agreements to a full service agreement, whereby we carry out all work to your compressed air system without exception. We are happy to advise you on your options.



BOGE S-4 series

Designed to take the lead



TECHNICAL DATA

BOGE type	Max. pressure*	Effective free air delivery	Motor power		Dimensions	Compressed air outlet ANSI	Weight silenced	Weight super-silenced
			Main drive	Fan motor				
	psig	cfm	hp	hp	W x D x H (inches)		lbs	lbs
S 56-4 LF N	100	102-399	75	3	94 x 56 x 79	2.5"	4740	4780
S 56-4 LF N	110	99-384	75	3	94 x 56 x 79	2.5"	4740	4780
S 56-4 LF N	125	84-355	75	3	94 x 56 x 79	2.5"	4740	4780
S 56-4 LF N	150	86-309	75	3	94 x 56 x 79	2.5"	4740	4780
S 76-4 N	100	532	100	3	92 x 56 x 79	2.5"	4770	4810
S 76-4 N	125	456	100	3	92 x 56 x 79	2.5"	4770	4810
S 76-4 N	150	444	100	3	92 x 56 x 79	2.5"	4770	4810
S 76-4 L N	150	421	100	3	92 x 56 x 79	2.5"	4570	4610
S 76-4 LF N	100	102-521	100	3	94 x 56 x 79	2.5"	4740	4780
S 76-4 LF N	110	101-506	100	3	94 x 56 x 79	2.5"	4740	4780
S 76-4 LF N	125	100-475	100	3	94 x 56 x 79	2.5"	4740	4780
S 76-4 LF N	150	97-427	100	3	94 x 56 x 79	2.5"	4740	4780
S 90-4 N	100	626	125	4	92 x 56 x 79	2.5"	4970	5010
S 90-4 N	125	565	125	4	92 x 56 x 79	2.5"	4970	5010
S 90-4 N	150	540	125	4	92 x 56 x 79	2.5"	4970	5010
S 90-4 LF N	100	102-601	125	4	94 x 56 x 79	2.5"	4960	5005
S 90-4 LF N	110	101-587	125	4	94 x 56 x 79	2.5"	4960	5005
S 90-4 LF N	125	100-558	125	4	94 x 56 x 79	2.5"	4960	5005
S 90-4 LF N	150	98-512	125	4	94 x 56 x 79	2.5"	4960	5005
S 110-4 N	100	723	150	4	92 x 56 x 79	2.5"	4990	5030
S 110-4 N	125	647	150	4	92 x 56 x 79	2.5"	4990	5030
S 110-4 N	150	614	150	4	92 x 56 x 79	2.5"	4990	5030
S 110-4 LF N	100	226-700	150	4	94 x 56 x 79	2.5"	4970	5010
S 110-4 LF N	110	204-679	150	4	94 x 56 x 79	2.5"	4970	5010
S 110-4 LF N	125	158-634	150	4	94 x 56 x 79	2.5"	4970	5010
S 110-4 LF N	150	87-564	150	4	94 x 56 x 79	2.5"	4970	5010

* Also available in pressures up to 200 PSI - C/F

BOGE S-4 series

Designed to take the lead



TECHNICAL DATA

BOGE type	Max. pressure*	Effective free air delivery	Motor power		Dimensions	Compressed air outlet ANSI	Weight silenced	Weight super-silenced
	psig		cfm	Main drive				
			hp	hp	W x D x H (inches)		lbs	lbs
S 111-4 N	100	733	150	4	116 x 64 x 79	3"	7830	7940
S 111-4 N	125	648	150	4	116 x 64 x 79	3"	7830	7940
S 111-4 N	150	601	150	4	116 x 64 x 79	3"	7830	7940
S 111-4 LF N	100	193-745	150	4	118 x 64 x 79	3"	7830	7940
S 111-4 LF N	110	192-726	150	4	118 x 64 x 79	3"	7830	7940
S 111-4 LF N	125	190-684	150	4	118 x 64 x 79	3"	7830	7940
S 111-4 LF N	150	187-618	150	4	118 x 64 x 79	3"	7830	7940
S 132-4 L N	100	848	175	4	116 x 64 x 79	3"	7830	7940
S 132-4 L N	125	836	175	4	116 x 64 x 79	3"	7830	7940
S 132-4 N	150	709	175	4	116 x 64 x 79	3"	8050	8160
S 132-4 LF N	100	193-867	175	4	118 x 64 x 79	3"	8050	8160
S 132-4 LF N	110	192-846	175	4	118 x 64 x 79	3"	8050	8160
S 132-4 LF N	125	190-801	175	4	118 x 64 x 79	3"	8050	8160
S 132-4 LF N	150	187-732	175	4	118 x 64 x 79	3"	8050	8160
S 160-4 N	100	1034	200	7	116 x 64 x 79	3"	8270	8380
S 160-4 N	125	954	200	7	116 x 64 x 79	3"	8270	8380
S 160-4 L N	150	826	200	7	116 x 64 x 79	3"	7940	8050
S 160-4 LF N	100	193-981	200	7	118 x 64 x 79	3"	8270	8380
S 160-4 LF N	110	192-962	200	7	118 x 64 x 79	3"	8270	8380
S 160-4 LF N	125	190-922	200	7	118 x 64 x 79	3"	8270	8380
S 160-4 LF N	150	186-857	200	7	118 x 64 x 79	3"	8270	8380

* Also available in pressures up to 200 PSI - C/F

BOGE AIR. THE AIR TO WORK.

GRUPO
Equipa

BOGE



Best
Of
German
Engineering

Customers in more than 120 countries worldwide trust in the BOGE brand. Already in its fourth generation, this family-run company directs all its experience into developing innovative solutions and exceptionally efficient products for the compressed air industry.

LADA SIN COSTO: 01 800-002-AIRE (2473)

MONTERREY: (81) 8376-0690, 8352-2638, 8352-2768, 8376-0691

SALTILLO: (844) 16 222 94

SAN LUIS POTOSÍ / MÉRIDA / GUADALAJARA: 045 (33)
1494-0988

TOLUCA : 722 573 95 91

CDMX : 55 30 28 38 35

www.grupoequipa.com

BOGE Compressors BOGE America, Inc.



003-US-US-0-04.2019 - Technical changes and errors reserved.